


# HEAVY DUTY, SINGLE SYSTEM HYDRAULIC TEST STAND

**940  
Series**

*Our Competent Engineering Staff Ensures You are Provided with the Exact  
Hydraulic Testing Equipment for Current and Future Applications  
Which Will Increase Your Profitability*

**2 Year  
Warranty**

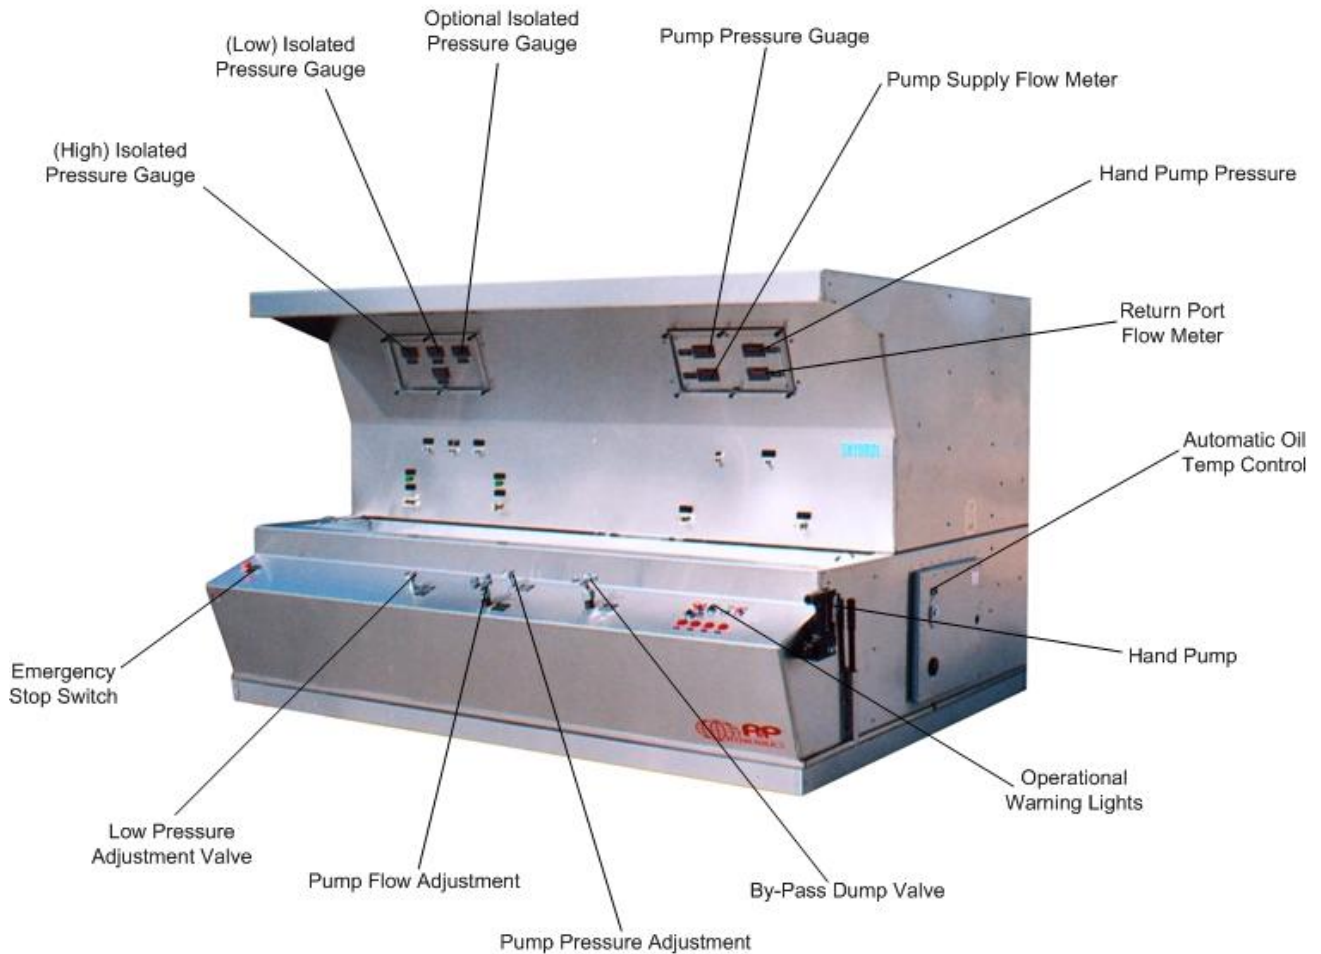

Model 07-944-05

*Features:  
Stainless Steel Construction  
Kidney Loop Pump for Continuously Filtering  
and Cooling of Hydraulic Fluid,  
Precise Digital Gauges*



9283 Industrial Blvd. Leland, NC 28451 USA  
Voice 910.371.1151 Fax 910.371.1152  
ap-hydraulics.com

# HEAVY DUTY, SINGLE SYSTEM HYDRAULIC TEST STAND

*Our Competent Engineering Staff Ensures You are Provided with the Exact  
Hydraulic Testing Equipment for Current and Future Application  
Which Will Increase Your Profitability*

## STANDARD FEATURES:

- **Single System**
  1. Complete Pressure Adjustment (450 – 5000 PSI)
  2. Complete Flow Adjustment (0 – Full GPM)
  3. Pressure and Return Ports
  4. Digital Pressure Gauges (.25% Accuracy)
  5. Digital Supply and Return Flow Meters (1% Accuracy)
  6. Safety Over Pressure Relief Valve
  7. By-Pass Dump Valve
  8. Pump Flow Control Valve
  9. Pump Pressure Control Valve
  
- **Four Pumps**
  1. Oilgear® Pressure Compensated Pump
  2. High Pressure Hand Pump (10,000 PSI)
  3. Work Sink Drain Pump
  4. Reservoir Kidney Loop Pump
  
- **High Pressure Hand Pump**
  1. Digital Pressure Gauge (.25% Accuracy)
  2. Pressure Release Valve
  3. Dedicated Port
  
- **Instrumentation - All Gauges Feature Easy Programmability for Field Calibration**
  - **Two Digital Flow Meters (1% Accuracy)**
    1. Pump Supply Flow
    2. Return Flow
  - **Four Digital Pressure Gauges (.25% Accuracy)**
    1. Pump Supply Pressure (6000 PSI)
    2. Hand Pump (0 – 10,000 PSI)
    3. Medium Isolated Pressure Gauge
    4. High Isolated Pressure Gauge
  
- **Safety Features**
  1. Ergonomically Located Emergency Stop Switch
  2. Safety Over Pressure Relief Valve
  3. Safety Drip Pan Completely Covers Bottom to Ensure Clean Floors
  4. All Electrical Components Installed in NEMA 4, 12 Enclosure
  5. All Gauges are Fully Enclosed in NEMA 4, 12 Enclosure with a Clear Front Safety Glass Cover
  6. Operational LED Warning Indicator Lights
  7. Dual Heavy Duty Floor Locks to Ensure Stability
  8. Optional Safety Glass Sliding Doors for Work Sink
  
- **Super Clean Filtration – Industry Leading Filtration Ensures Quality While Increasing Aircraft Component Life**
- High Efficiency, Non-Bypass Pressure Filter (3 Micron Absolute)
- Reservoir Kidney Loop Filter (3 Micron Absolute)
- Sink Drain Filter (3 Micron Absolute)
- Reservoir Fill Pump Filter (3 Micron Absolute)
  
- **4-Way Directional Flow Control Valve**  
Manually Operated 4-Way Directional Flow Control Valve with Complete Flow Control



# HEAVY DUTY, SINGLE SYSTEM HYDRAULIC TEST STAND

*Our Competent Engineering Staff Ensures You are Provided with the Exact  
Hydraulic Testing Equipment for Current and Future Application  
Which Will Increase Your Profitability*

- **Operational Warning Lights**
  1. Pressure Filter Condition  
LED Warning Indicator for Clogged Conditions
  2. Kidney Loop Pump Filter Condition  
LED Warning Indicator
  3. Reservoir Low Level LED Warning Indicator
  4. High Fluid Temperature LED Warning Indicator
- **2 Stand Alone Noshock® Pressure Gauges**  
\* Suggested Ranges 0-1000 PSI and 0-6000 PSI
- Over Pressure Gauge Savers on all Gauges
- **Reservoir Kidney Loop Pump**
  - Continuously Filters Fluid
  - Continuously Cools Fluid
- **Automatic Oil Temperature Control**
  - Panel Mounted Oil Temperature Set Point
  - Digital Oil Temperature Gauge
- **Additional Features**
  - All Welded, 14 Gauge B3 (Brushed Finish) Stainless Steel Cabinet
  - Illuminated Work Area Provided By Overhead Sink Light
  - Test Port for all Pressure Gauges
  - Easy Access Exterior Fluid Sampling Valve to Meet Quality Parameters
  - Safety Drip Pan Completely Covers Bottom
  - Work Sink with Perforated Metal Grating
  - Heavy Duty All Welded 1/4" Think Wall Tubing Frame with Fork Lift Brackets
  - Easy Maneuvering Ensured by Two Fixed and Two Swivel Castors with Stability Provided by the Heavy Duty Floor Lock
  - Work Sink Drain Pump with Filter (4 GPM)
  - Durable Laser Engraved, Aluminum Placards
  - Panel Mounted Operational Instructions
  - Current Pressure Gauge and Flow Meter Certificates of Calibration

Dimensions: Length 112" Width 80" Height 77"

<b>SPECIFICATIONS:</b>					
<b>SERIES MODEL</b>	<b>PUMP PRESSURE PSI (bar)</b>	<b>MOTOR HP (kw)</b>	<b>PUMP FLOW</b>		<b>WEIGHT Lbs. (kg)</b>
			<b>50 Hz GPM (lpm)</b>	<b>60 Hz GPM (lpm)</b>	
07-942-**	450 - 5000 PSI 30 - 340 bar	60 HP 44 kw	20 GPM 75 lpm	25 GPM 94 lpm	3900 lbs 1775 kg
07-944-**	450 - 5000 PSI 30 - 340 bar	75 HP 56 kw	28 GPM 106 lpm	34 GPM 126 lpm	4900 lbs 2227 kg
07-946-**	450 - 5000 PSI 30 - 340 bar	100 HP 74 kw	33 GPM 125 lpm	40 GPM 150 lpm	5100 lbs 2313 kg

\*\*Model by Fluid Type: Mil-H-5606 = 02 Mil-H-83282 = 03 Skydrol = 05



9283 Industrial Blvd. Leland, NC 28451 USA  
Voice 910.371.1151 Fax 910.371.1152  
ap-hydraulics.com